


ACDelco

DEXRON®-III (H) AUTOMATIC TRANSMISSION FLUID



ENGINEERED FOR PERFORMANCE

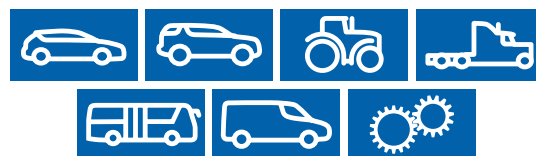

PRODUCT DESCRIPTION

ACDelco DEXRON® III (H) is a premium quality automatic transmission fluid intended for use as service-fill for automatic transmissions and vehicle components that use automatic transmission fluid as a lubricant or hydraulic fluid, such as transfer cases, manual transmissions and power steering systems.

FEATURES & BENEFITS

- Superior oxidation stability, excellent cycling durability, good corrosion prevention, foaming resistance, and controlled frictional properties
- Provides excellent seal compatibility, wear protection, and smoother shifting performance under normal and severe conditions

APPLICATIONS

- ACDelco DEXRON® III (H) is recommended for application in General Motors vehicle transmissions requiring DEXRON® III (H), DEXRON® III, DEXRON® IIE, DEXRON® II, and DEXRON® automatic transmission fluids.
- ACDelco DEXRON® III (H) is also recommended for use in vehicles requiring application of a MERCON® automatic transmission fluid.
- ACDelco DEXRON® III (H) fluid is not recommended for use in applications requiring a General Motors DEXRON® VI Fluid.

ACDelco P/N	Product Name	Viscosity	Size (L)	Specifications
19371514	DEXRON® III (H)	ATF	1	DEXRON® III (H)
12378329	DEXRON® III (H)	ATF	4	DEXRON® III (H)
12378330	DEXRON® III (H)	ATF	20	DEXRON® III (H)

HEALTH & SAFETY

Material Safety Data Sheets (MSDS) are available for download at www.acdelco.com.au

This product should not be used for purposes other than its intended use.

If disposing of used product, take care to protect the environment.



GM STANDARDS/SPECIFICATIONS

- GMW3001
- GMW3059

PROPERTIES

Viscosity

- cSt @ 40°C 35.84
- cSt @ 100°C 7.33
- cP @ -40°C 17,430

Viscosity Index 176

Flash Point, °C (°F) 209 (408)

Gravity, API 32.7

Color Red



For your nearest ACDelco Automotive Parts Stockist
call **1800 ACDelco** or visit **acdelco.com.au**

